


Giunto di transizione ottone PE filettato maschio

PE100/SDR 11 - S5 Gas - PN 16 20°C

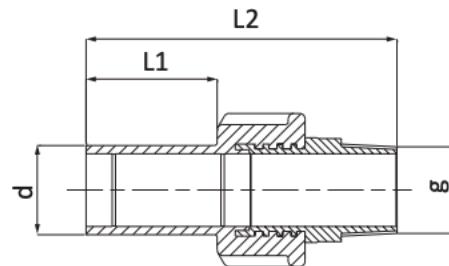

PE100 - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 e successive modifiche)

CODE	DIM dxg [mmxin]	L1 [mm]	L2 [mm]	PACK RIF. 2
3626020002001	20x1/2"	42	95	100
3626025003001	25x3/4"	44	103	80
3626032004001	32x1"	47	112	50
3626040005001	40x1"1/4	52	124	30
3626050006001	50x1"1/2	58	135	20
3626063007001	63x2"	66	153	12